


RF Single Color Remote Controller




Important: Read All Instructions Prior to Installation

Function introduction

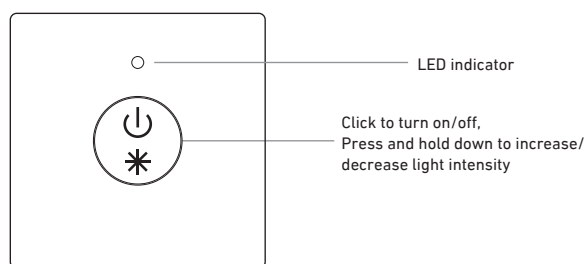

Front side



If the remote is out of power,
you can open the back cover
and replace the battery(CR2025).

09.2807S.04134

Product Data

Output	RF signal
Operation Frequency	868/915/434MHz
Power Supply	3V(CR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	32 x 32 x 9.8 mm


- > Control 1 zone
- > Single color controller
- > Memory Function
- > Compatible with all universal series RF receivers
- > 1 receiver can be paired by max 8 different remote controls.
- > Waterproof grade: IP20

Safety & Warnings

- > This device contains a button lithium battery that shall be stored and disposed properly.
- > DO NOT expose the device to moisture.

Operation

1. Pair with RF receivers:

Click "Learning Key" on RF receiver → Click  * button on RF remote → LED lights connected with the RF receiver will flicker once → The receiver is paired with remote successfully.


2. How to delete the pairing:

Press and hold down "Learning Key" on the receiver for over 3 seconds until connected LED lights flicker twice, which means the pairing is deleted successfully.

Photo:



Diagram:

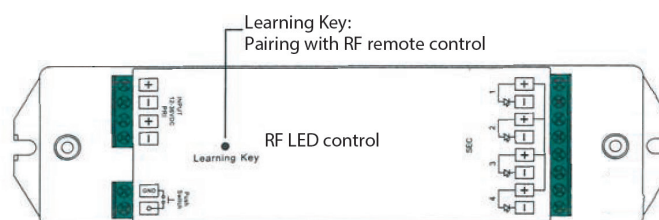

EC Declaration of Conformity (EC DoC)

According to the Low voltage directive 2014/35/EU, EMC Directive 2014/30/EU and RoHS Directive 2011/65/EU

Type of Equipment: LED kit with dimmer+PS 3455mm. 24V
Brand Name and trademark: Develtron A/S
Type Designation: DOLLE LED kit
Manufacturer: Develtron A/S
Address: Ribevej 13B
8940 Randers SV.
Telephone: +4570270730

The following products are compliant with this document.

- SL3003410 DOLLE LED kit with dimmer+PS 3455mm 24V

The LED Kit complies with good engineering practices in safety matters, and the included sub components are all compliant with the CE directive and the RoHS Directive 2011/65/EU.

The following components are compliant with RoHS Directive 2011/65/EU.

> LEDStrip: 640041 Coo 24V LED 19,2W 3000K 300LED/m IP20
> LED Driver: 600245 24VDC LED PS 75W -Snappy
> RF LED Dimmer: 22742 Dimmer 4x60W for remote control
> Remote control: 20222 RF remote control 1 zone silver/grey
> Power cord: 15856 Male 230V Power cable 2-pin white
> LED strip cable: 15820 PI connector 20cm male white
> LED PS cable: 15817-3A PI connector 20 cm female white

The lamps estimated life cycle 30.000 hours.


Peter Johansen
develtron@develtron.dk

Date: 22-03-2021